

TSW110

L2 UNMANAGED SWITCH



TSW110 360° VIEW

// TSW110 is a layer 2 unmanaged switch, which is a simplified version of our earlier product – TSW100.

// Possible to power up through the first ETH port.

// It has five 10/100/1000 Mbps Ethernet ports for an economical high-bandwidth solution.

// It offers a wide range of supported power supply voltages (9-30 V).

// Ideal for professional high bandwidth applications to provide reliable data connection.



GIGABIT ETH

5 x Gigabit Ethernet with speeds up to 1000 Mbps

DURABILITY

Rugged aluminum housing

MOUNTING

DIN rail and surface mounting options

TEMPERATURE

Operating temperature -40 °C to 75 °C



KEY FEATURES


HARDWARE

Powering option	4-pin power socket, 9-30 VDC
Power consumption	Idle: < 0.4 W, Max: < 1.8 W
Ethernet	5 x 10/100/1000 Ethernet ports
Status LEDs	10 x Ethernet, 1 x Power
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Dimensions	100 x 30 x 85 mm
Weight	227 g

PERFORMANCE SPECIFICATIONS

Bandwidth	10 Gbps
Packet buffer	128 KB
MAC address table size	2K entries
Auto MDI/ MDI-X Cable Detection	Yes

FRONT VIEW

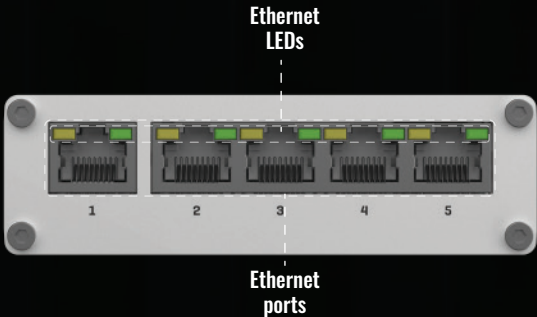

BACK VIEW

